


# ROD HANDLER NEXT H3Y PLUS

Automatic Drill rods Handler Mounted on the rig, compact and light design.

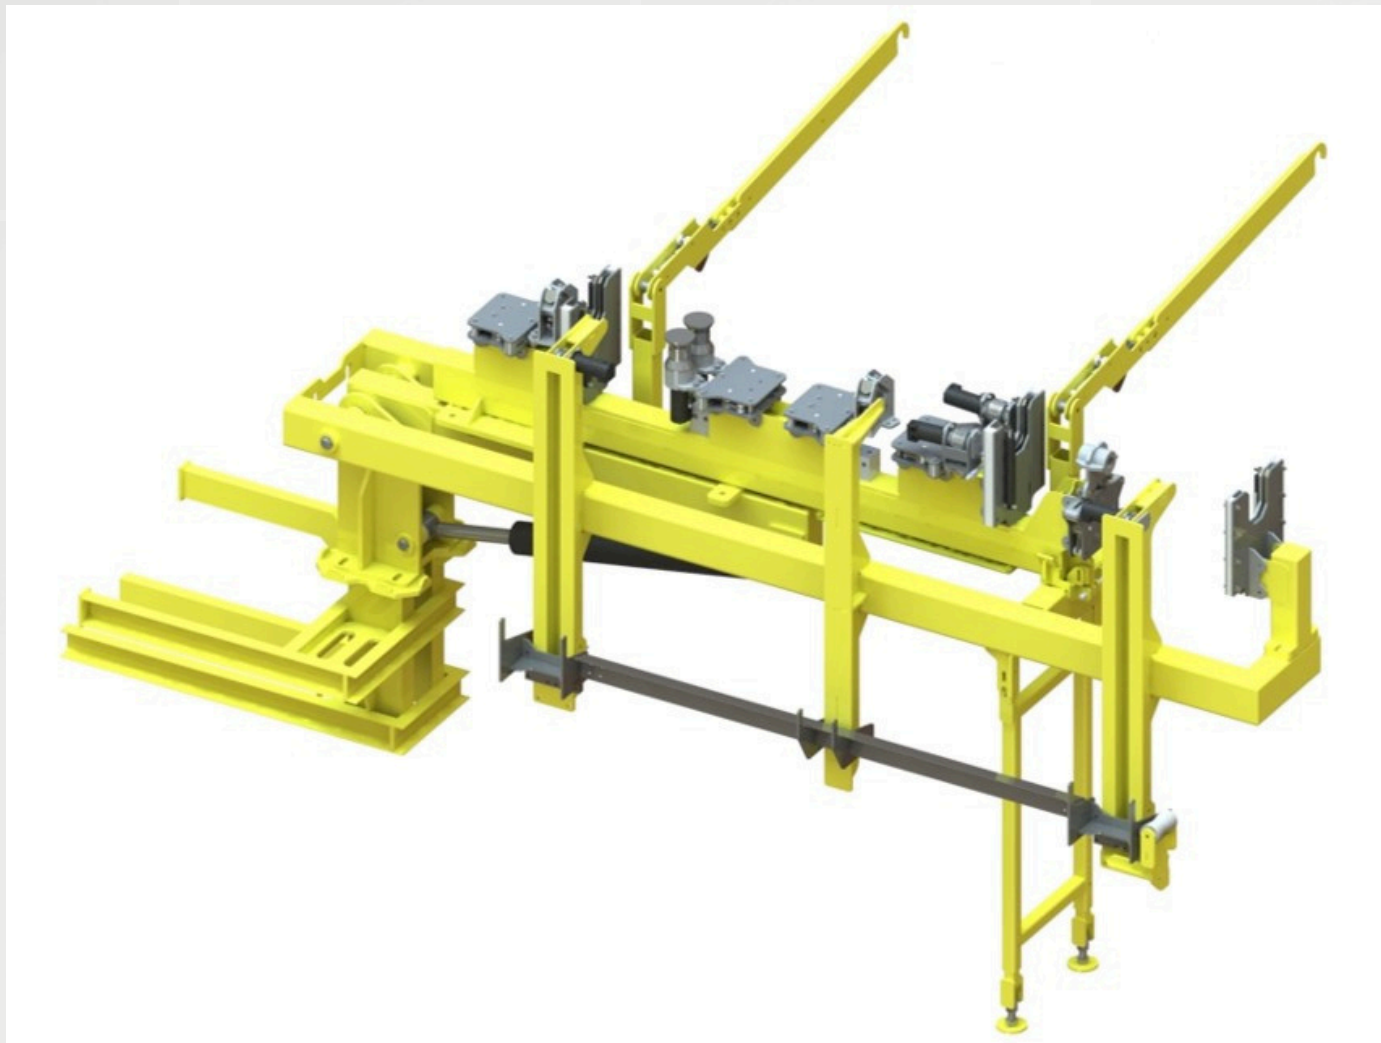

- For 3 meters lengths in N, H and P sizes; without replacement of guides or Jaws.
- Equipped with a feeding slide with 16 HQ, 3 m. rods capacity.
- Permanent mounting fixture for surface diamond drill rigs of any size or model, "top or chuck drive".
- Requires only one hydraulic and electrical connection from the drill rig.
- Folds on the rig for easy transportation.
- Automatic inner tube and overshot handling.
- Remote operation (with cable) by one person only, panel can be mounted inside operator's cabin for safe operation.

## TECHNICAL DATA

Diameters / Diametros	N	H	P
Capacity rod feed / capacidad alimentador de barras	21 rods/ barras	16 rods/ barras	13 rods/ barras
	206 ft - 63 mts	157 ft - 48 mts	127 ft - 39 mts
	1057 lbs - 480,9 kgs	1203 lbs - 547,2 kgs	1487 lbs - 676 kgs

Rod length / Largo de Barras	10 Ft	3 mts.
Hydraulic Power / Potencia hidraulica requerida	13,2 gpm @ 2000 psi	50 lpm @ 137 bar
Weight / Peso del equipo	2.640 lbs.	1.200 kgs.
Cycle time / Tiempo de Ciclo por barra	< 50 sec.	
Work angle / angulo de trabajo	-45° -90°	

